


8305HP Receiver

- The OmniSTAR 8305HP receiver is a rugged, low maintenance, cost efficient L-band receiver for precise positioning.
- The standard 5 Hz position output enables accurate positioning. For high dynamic and high speed circumstances a 20 Hz option is available.
- Its rugged, waterproof enclosure protects the receiver against rain and dust and keeps the receiver working even in severe conditions.

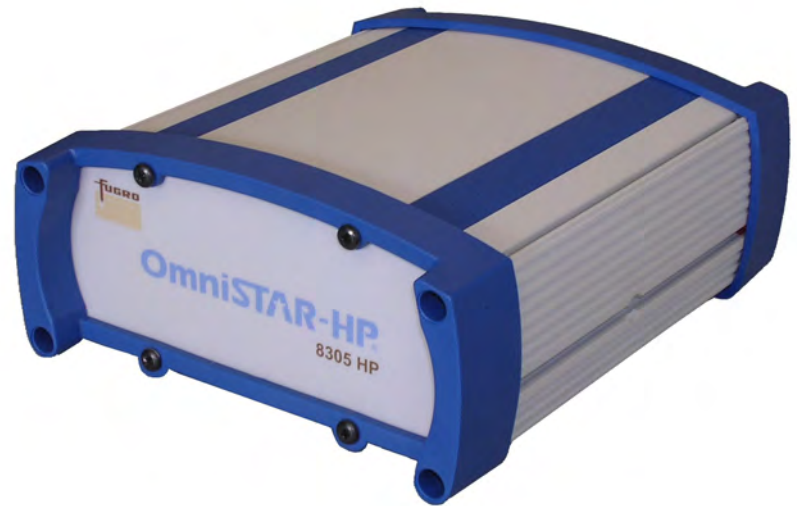

[Specification](#)

[Click for more information or Pricing](#)